


1.6

**Kanalski ventilator konvektori srednjeg statičkog pritiska**

Dvocevni sistem

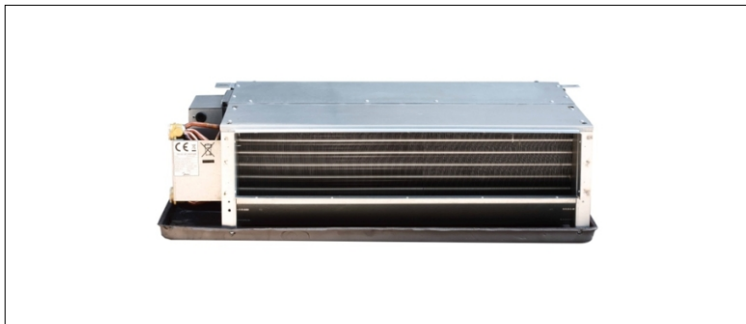

- Trokraki ventil opcionalno
- KJR-18B/E ili CE-KJR-21B/D termostat (opcionalno)
- Tipična primena hotelska soba
- Nizak nivo buke



MKT2H



1

Tip MKT2	200	300	400	500	600	800	1000	1200	1400
----------	-----	-----	-----	-----	-----	-----	------	------	------

Nominalni protok vazduha	m <sup>3</sup> /h	340	510	680	850	1020	1360	1700	2040	2380
Kapacitet hlađenja	kW	2	2.7	3.6	4.5	5.4	7.2	10.6	11	13
Eksterni statički pritisak	Pa	30	30	30	30	30	30	30	30	/
Kapacitet grejanja	BTU/h	10.950	14.700	18.450	23.200	27.650	37.550	46.050	56.300	66.550
	kW	3.2	4.3	5.4	6.8	8.1	11	13.5	16.5	19.5
Pomoćni električni grejač	kW	0.5	0.65	1	1	1.5	2	2	3	3
Protok vode	m <sup>3</sup> /h	0.34	0.46	0.62	0.77	0.93	1.23	1.54	1.89	2.24
Pad pritiska vode	kPa	9.61	10.78	20.6	13.89	17.23	14.17	20.16	34.27	39.17
Usisna / potisna cev		3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Nivo buke	dB	36	38	40	42	43	43	46	47	48
Težina	kg	12	13	15	19	19	27	29	33	34
Dimenzije	mm	770x240x490	827x240x490	927x240x490	1.140x240x490		1.440x240x490	1.564x240x490	1.835x240x490	

■ Usis vazduha moguć sa donje strane

■ Usis vazduha moguć sa zadnje strane

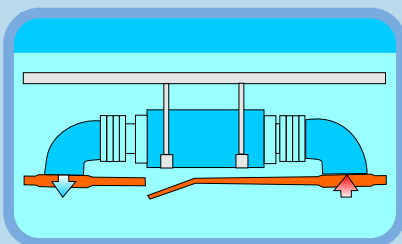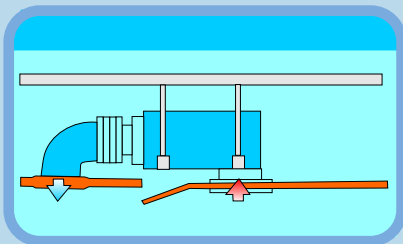

Naručuje se opcionalno

Prednji plenum	Prednja maska	Platneni vazdušni prolaz	Filter vazduha

